


SC200/200TD

- No counterweight.
- Smoothly movement while started.
- Low wear-out.
- Automatic landing system alternative(selected), release the working strengthening of operator.
- Can be with overload device(selected).
- Can be with calling system alternative(selected).

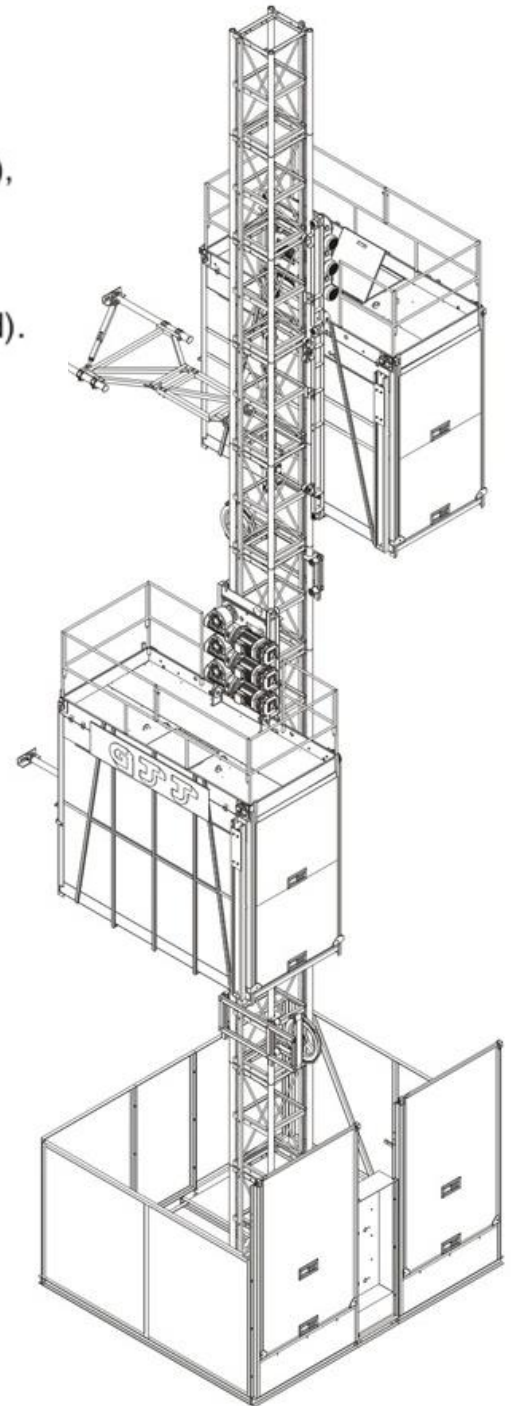

Mode	SC200/200TD	SC200TD
Payload capacity	2 × 2000	2000
Erection load capacity	2 × 1000	1000
Lifting device capacity	2 × 200	200
Maximum mounting height	550	550
Speed(50Hz/380V) (60Hz/440V)	36m/min	36m/min
Safety device	SAJ40-1.2	SAJ40-1.2
Cage dimension (Length × Width × Height)	3.2 × 1.5 × 2.5m	3.2 × 1.5 × 2.5m
Mast section type	0.65 × 0.65 × 1.508m	0.65 × 0.65 × 1.508m
Motor power	2 × 3 × 11	3 × 11
Motor current capacity	2 × 23.5	23.5
Motor starting current	2 × 128	128
Power consumption	2 × 48	48
Power supply fuses	2 × 93	93
Enclosure weight	1480	980
Cage weight	2 × 1800	1800
Driving machine weight	700	700
Counter weight	0	0
Mast section weight	{ 150kg (d=4.5) 170kg (d=6.3) 190kg (d=8.0) 210kg(d 10)	{ 125kg (d=4.5) 145kg (d=6.3) 165kg (d=8.0) 185kg (d 10)